


**COLOR PLANK  
COLLECTION**  
*—by Somerset™—*



SOLID APPALACHIAN OAK FLOORING IN  
PLANK WIDTHS AND POPULAR COLORS—  
TO ADD TIMELESS STYLE TO YOUR SPACE.

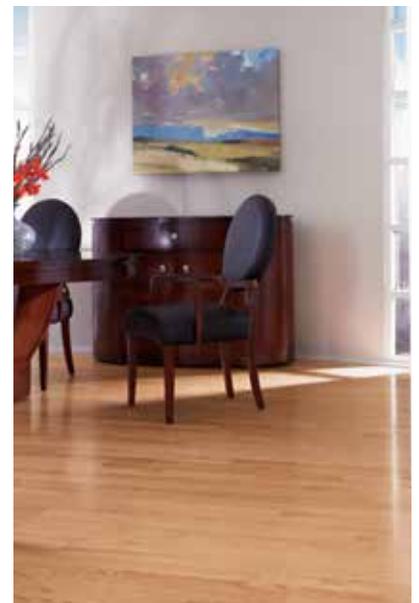

**S SOLID**  
3/4" thick, random lengths up to 6-1/2'  
WIDTHS: 4", 5"

**S SOLIDPLUS™ ENGINEERED**  
1/2" thick, 3mm thick solid sawn wear  
layer, 8-ply, random lengths up to 6-1/2'  
WIDTHS: 3-1/4", 5"



PRODUCT SPECIFICATION SHEET

02/14

# COLOR PLANK: SOLID



Product:	Somerset <b>Color Plank Collection</b> Solid Hardwood Flooring			
Species:	Red Oak or White Oak (Somerset does not mix species.)			
Grade:	Proprietary Somerset grade that meets or exceeds NOFMA Standard and Better.			
Dimensions:	<b>Thickness:</b> 3/4"* <b>Widths:</b> 4", 5" <b>Lengths:</b> Random from 10" up to 6-1/2' (conforms to NOFMA Standard and Better specification) <small>*Nominal</small>			
Construction:	Traditional 3/4" solid construction produced from domestically grown and harvested Appalachian hardwood. Material conforms to Appalachian Hardwood Manufacturers, Inc.'s Verified Sustainable Seal ( <a href="http://www.appalachianwood.org">www.appalachianwood.org</a> ). Product is also affiliated with National Oak Flooring Manufacturers Association and the National Wood Flooring Association.			
Profile:	Eased Edge, Eased End			
Finish:	Ultimate™ Urethane Finish — UV Cured Aluminum Oxide, Abrasion Resistant Finish			
Colors:	<b>4" Width</b>	<b>5" Width</b>	<b>Species</b>	
	Natural Red Oak	PP41ROB	PP51ROB	Red Oak
	Natural White Oak	PP41WOB	PP51WOB	White Oak
	Golden Oak	PP41GOB	PP51GOB	Red Oak
	Gunstock	PP41GUB	PP51GUB	White Oak
	Mocha	PP41MOB	PP51MOB	Red Oak
	Smoke	PP41SMB	PP51SMB	Red Oak
	Metro Brown	PP41MBB	PP51MBB	White Oak
Gloss Level:	Semi Gloss			
Janka Hardness:	<b>Species</b>	<b>Lbs</b>		
	Red Oak	1290		
	White Oak	1360		
MSDS:	Not required for cured finish, MSDS for Wood Dust available on request			
Flame Spread:	Class C			
Installation:	Nail down or staple, on or above grade. (NWFA Installation Guidelines and Methods, revised: March, 2007.) Installation guidelines are printed on the bottom of each carton and available at <a href="http://www.somersetfloors.com">www.somersetfloors.com</a>			
Maintenance:	Somerset Ultimate™ Wood Floor Cleaner ( <a href="http://www.somersetfloors.com">www.somersetfloors.com</a> )			
Limited Warranty:	50-Year Finish Wear; Lifetime Structural Integrity ( <a href="http://www.somersetfloors.com">www.somersetfloors.com</a> )			
Molding:	Quarter Round, Stair Nose, Threshold, T-Mold, and Reducer			

# COLOR PLANK: **SOLIDPLUS™** ENGINEERED



Product:	Somerset <b>Color Plank Collection SolidPlus</b> Engineered Hardwood Flooring			
Species:	Red Oak or White Oak (Somerset does not mix species.)			
Grade:	Proprietary Somerset grade that meets or exceeds NOFMA Standard or Better.			
Dimensions:	<b>Thickness:</b> 1/2"*; 3mm* thick solid dry sawn wear layer <b>Widths:</b> 3-1/4", 5" <b>Lengths:</b> Random from 10" up to 6-1/2' *Nominal			
Construction:	8-ply cross-grain engineered construction; 7-ply birch core.			
Profile:	Eased Edge, Eased End			
Finish:	Ultimate™ Urethane Finish — UV Cured Aluminum Oxide, Abrasion Resistant Finish			
Colors:	<b>3¼" Width</b>	<b>5" Width</b>	<b>Wear Layer Species</b>	
	Natural Red Oak	EP314ROE	EP512ROE	Red Oak
	Natural White Oak	EP314CPWOE	EP512CPWOE	White Oak
	Golden Oak	EP314GOE	EP512GOE	Red Oak
	Gunstock	EP314GUE	EP512GUE	White Oak
	Mocha	EP314MOE	EP512MOE	Red Oak
	Smoke	EP314SME	EP512SME	Red Oak
	Metro Brown	EP314MBE	EP512MBE	White Oak
Gloss Level:	Semi Gloss			
Janka Hardness:	<b>Species</b>	<b>Lbs</b>		
	Red Oak	1290		
	White Oak	1360		
MSDS:	Not required for cured finish, MSDS for Wood Dust available on request			
Flame Spread:	Class C; ASTM E84 Flame Spread Index - 138			
Formaldehyde Emissions:	ASTM D6007; BLQ (beneath limit of qualification - .008ppm)			
Critical Radiant Flux (CRF):	ASTME648 - Test in Progress			
Installation:	Nail, staple, glue down, or float on, above or below grade (ground level). (NWFA Installation Guidelines and Methods, revised: March, 2007.) Installation guidelines are printed on the bottom of each carton and available at <a href="http://www.somersetfloors.com">www.somersetfloors.com</a>			
Maintenance:	Somerset Ultimate™ Wood Floor Cleaner ( <a href="http://www.somersetfloors.com">www.somersetfloors.com</a> )			
Limited Warranty:	50-Year Finish Wear; Lifetime Structural Integrity ( <a href="http://www.somersetfloors.com">www.somersetfloors.com</a> )			
Molding:	Quarter Round, Stair Nose, Threshold, T-Mold, and Reducer			